1857

R.S. KNAPP CO

FINISH SCHEDULE

NO.	ROOM	FLOOR	BASE	WALLS	CEILING	HT.	REMARKS
100	EXISTING ROOM						
101	NEW SHOWROOM	CARPET	VINYL	GYP. BD. PAINTED	ACOUSTIC PANEL	10'	
102	LOADING DOCK	CONC.	-	EXP. BLOCK PAINTED	EXPOSED	/	
103	UTILITY RM	CONC.	-	BYP. PLASTER ON EXP. BLK/GYP. BD. PAINTED	EXPOSED	/	
104	JAN. CL.	CER. TILE	C.T.	CER. TILE	AC. PANEL ON ACOUSTEX	8'	
105	MEN'S TOILET	CER. TILE	C.T.	CER. TILE			
106	WOMEN'S TOILET	CER. TILE	C.T.	CER. TILE			
107	LUNCH	CARPET	V.B.	GYP. BD. PAINTED		8'	
108	BUSINESS OFFICE	CARPET	V.B.	GYP. BD. PAINTED		8'	W/ BORROWED LIGHT
109	MANAGER'S OFFICE	CARPET	V.B.	GYP. BD. PAINTED		8'	"
110	SAMPLE RM	CARPET	V.B.	GYP. BD. PAINTED		10'	"
111A	CLOSING RM	CARPET	V.B.	GYP. BD. PAINTED		10'	
111B	CLOSING RM	CARPET	V.B.	GYP. BD. PAINTED		10'	
111C	CLOSING RM	CARPET	V.B.	GYP. BD. PAINTED		10'	
103A	LOCKER RM	CARPET	V.B.	GYP. BD. PAINTED		8'	

DOOR SCHEDULE

NO.	SIZE	DOOR TYPE	DOOR MATL.	FRAME TYPE	FRAME MATL.	HARDWARE BUTT	LOCK	LATCH	PANIC BOLT	CLOSER	SADDLE	W'STRIP	REMARKS
E-1	3'-0" x 7'-0" x 1 3/4"	A	WD	1	ALUM	●	●	●		2	●	●	SEE DRAWING A-3
E-2	3'-0" x 7'-2" x 1 3/4"	D	HM	2	HM	●	●			●	●	●	
E-3	3'-0" x 7'-2" x 1 3/4"	D	HM	2	HM	●	●			●	●	●	
E-4	8'-0" x 10'-0" x 1 3/4"	—	STL.	3	STL.	-	●	-	-	-	●		OVERHEAD DOORS
1	2'8"x8'-0" x 1 3/4"	D	HM	4	HM	●	●			2	X		CARPET STRIP
2	3'-0" x 7'-0" x 1 3/4"	D	WD	5	HM	●	●			X			CARPET STRIP
3	2'-6" 7'-0" x 1 3/4"	D	WD	5	HM	●	●			M			MARBLE
4	3'-0" 7'-0" x 1 3/4"	D	WD	5	HM	●		●		●	M		"
5	3'-0" x 7'-0" x 1 3/4"	D	WD	5	HM	●	●	●		●	M		"
6	3'-0" x 7'-0" x 1 3/4"	C	WD	5	HM	●	-	●					
7	3'-0" x 7'-0" x 1 3/4"	C	WD	5	HM	●	●						
8	3'-0" x 7'-0" x 1 3/4"	C	WD	5	HM	●	●						
9	2'-6" x 7'-0" x 1 3/4"	B	WD	6	HM	-	●						
9A	3'-0" x 7'-0" x 1 3/4"	B	WD	5	HM	●	●			X			SLIDING DOOR CARPET STRIP



A DOOR TYPES
SCALE - 1/4" = 1'-0"

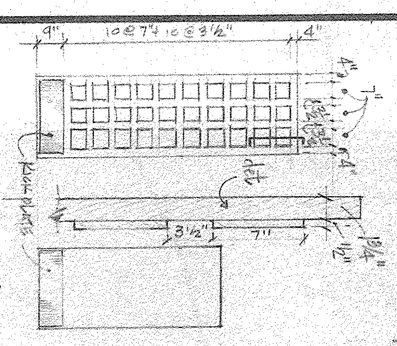

B



C



DET. 3



DET. 5



DET. 4



DOOR DETAILS

SCALE - 1 1/2" = 1'-0"

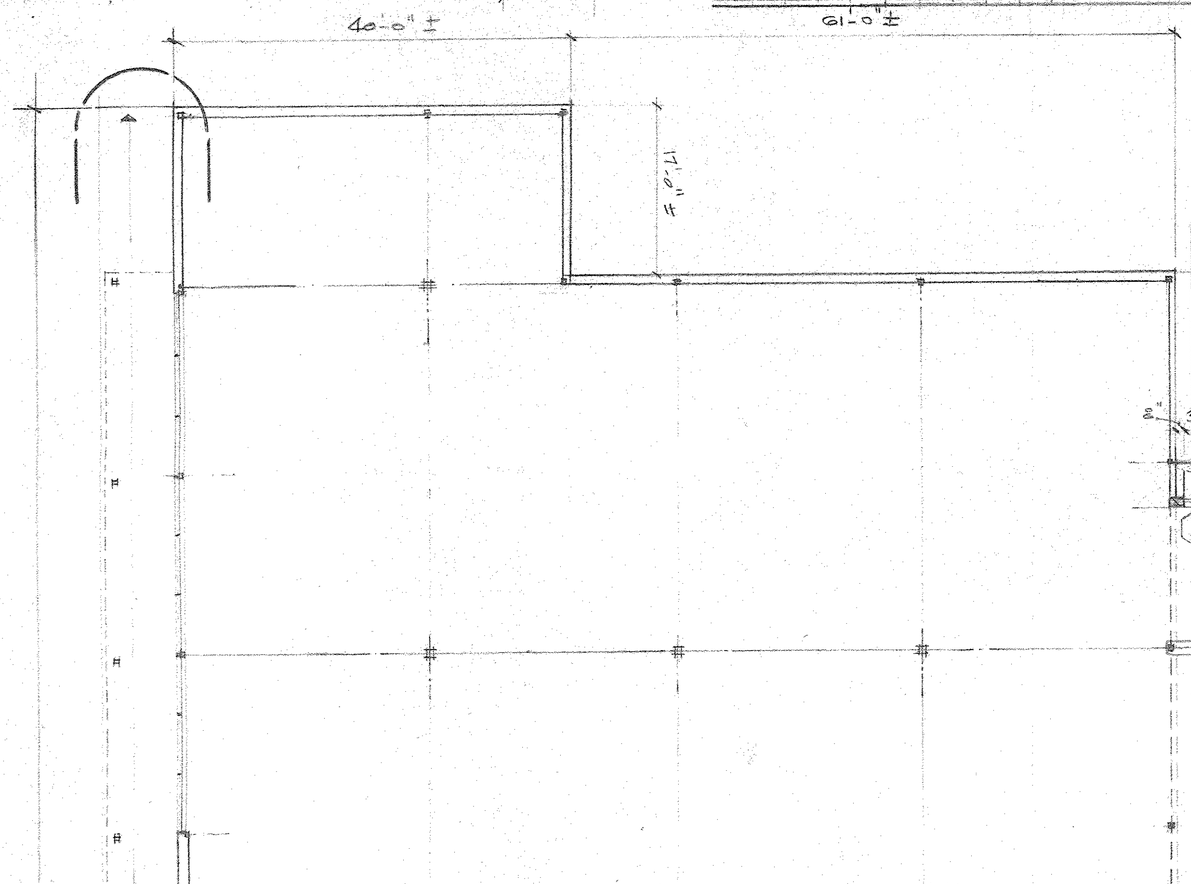
40'-0" ±
61'-0" ±
17'-0" ±
26'-0" ±
91'-0" ±
ELEVATION - (E-3)
3'-4"
3'-10"
HM FRAME 2"x6 1/4"
1/4" CL. GLASS (PLATE GLASS)
5'-0"
FLUSH
ELEVATION - (E-2)
SINK
1/4" CL. SAFETY GLASS
2"x6 1/4" HM FRAME
BLUE LAMINATE COUNTERS & CABINET
3'-8"
3'-0"
3'-0"
(E-2)
WALL CASES
EQUIPT. BY OWNER
ELEVATION - (1)
SINK
MICRO
OVEN RGE
REFR.
CASE + COUNTER
ELEVATION - (1)
3'-8"
2'-3"
12'-0"
2'-0"
2"x6 1/4" HM FRAME
5'-0"
10'-6"
8"
1'-0"
8"
7'-8"
4"
7'-8"
4"
7'-8"
4"
19'-8"
4"
12'-8"
4"
10'-4"
1'-6"
8'-2"
4"
4"
5'-8"
4"
8'-8"
36'-0"
36'-0"
36'-0"
14'-2"
56'-0"
CLOSING ROOMS 111A,B,C
SAMPLE RM. 110
MGR. 109
BUS. OFFICE 108
LUNCH 107
WOMEN'S TOILET 106
MEN'S TOILET 105
UTILITY 103
LOCKER RM. 103A
JAN. CL. 104
LOADING DOCK 102
OVERHD DOORS
DOCK BUMPERS
WHEEL STOPS
WEATHER ENCLOSURE DOOR SEAL
28'-0"
2'-8"
4'-8"
5'-0"
8'-0"
6'-0"
2'-8"
1'-0"
112.0
113.12
111.6
4'-3"
5'-0"
5'-0"
5'-0"
25'-0"
28'-0"
10'-0" ±
92'-0"
ADDITION
NEW WORK
EXISTING
ELEVATION - GAS STEPS
SCALE - 1/4" = 1'-0"
3'-0"
2'-0"
FIN FLR
12" STEP
7 1/2"
CONC. STEP & FOOTING
ELEVATION GAS STEPS
NOTE: EXISTING FACADE TO BE ALTERED SEE DRAWINGS A-3 & 4 FOR DETAILS.
EXISTING SIDEWALK
EXISTING CANOPY TO BE REMOVED
EXISTING COLUMNS TO BE REMOVED
EXISTING MASONRY
EXISTING ALUM. STOREFRONT TO BE REMOVED
EXISTING SHOW ROOM FIN. FLR. ELEV. 114.61
EXISTING ALUM. STOREFRONT TO BE REMOVED
EXISTING ALUM. STOREFRONT TO BE REMOVED
EXISTING ALUM. STOREFRONT TO BE REMOVED